

PHANTOM 2 INJECTOR

INCREASE YOUR UPTIME BY ELIMINATING IN- SEASON MAINTENANCE.

Bazooka Farmstar's upgraded Phantom 2 manure injection units are built for versatility, longevity, and reduced maintenance for both toolbars and tank bars. They provide maximum performance with minimal soil disturbance. These injection units ensure uniform nutrient coverage across the entire field by precisely injecting liquid manure 4"-6" beneath the surface.

- Built for longevity
- Little to no in-season maintenance
- Easy-to-replace wear parts
- Low soil disturbance
- Even nutrient coverage
- Precise nutrient placement
- Upgrade GPA with Phantom 2 Edge



**Images shown include Edge upgrade.*



FEATURES

UP TO 20,000 GPA CAPABILITY

Phantom 2 units can achieve GPA rates from 2,500 up to 20,000. GPA rates will be dependent on unit spacing, ground conditions, type of liquid manure, etc. Phantom 2 is available with the Edge upgrade for GPA capabilities up to 25,000.

RUGGED COMPONENT CONSTRUCTION

All pins, attachment points, and structures have been reinforced for longevity and performance in demanding environments. Pins are nickel-plated for corrosion resistance, decreased wear, and smoother operation.

LITTLE TO NO IN-SEASON MAINTENANCE

Greaseless main pin and closure pin bushings, as well as the heavy-duty sealed main hub and closure hub bearings, make this unit entirely maintenance-free during the application season.

CLOSURE BLADE DOWNFORCE ADJUSTMENT

New to Phantom 2, a heavy-duty torsion spring can now be adjusted to apply increasing amounts of down pressure to the closure blade, ensuring consistent coverage in varying field conditions and soil types.

AVAILABLE ON TITAN TOOLBARS AND STANDARD TANK BARS

The Phantom 2 Injector is only available fully assembled on new Titan toolbars and standard tank bars.

SPECIFICATIONS

STANDARD


- Spacing options: Titan Toolbars: 18", 20", 24", 30"
- 4" – 6" running depth with depth gauge wheel and cover plate
- 5° unit angle – Recommended for Titan Toolbars
- 3° unit angle – Recommended for Tank Bars
- Wavy, main coultter blade | 22" diameter
- Wavy, closure blade | 17" diameter
- Mounting plate and hardware for 6" x 4" vertically oriented tubes
- Nickel-plated floating mount pin with maintenance free bushings
- Bolt-on main hub and spindle
- Adjustable main arm down pressure (spring adjust or hydraulic pressure adjust)
- Cast ductile iron closure mount and arm
- Adjustable closure position and angle
- Adjustable down-force spring for closure arm
- 3" drop tube with U-bolt hose clamp
- Maintenance free bearing and bushings throughout

UPGRADES

- Phantom 2 Edge for up to 25,000 GPA

DOWNFORCE OPTIONS

DUAL COMPRESSION SPRING DOWNFORCE

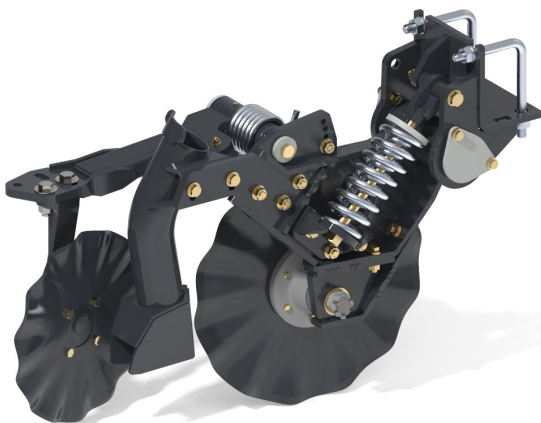

HYDRAULIC CYLINDER DOWNFORCE

